

ARIA

SERIES

SOLAR

Street Light

E-LITE semicon

BY

גל-אור
פתרונות סולארים



GAL OR
SOLAR SOLUTIONS

LIGHTING THE WAY

SOLAR meets LEDs

The sunshine is a sustainable, reliable, non-polluting source of power. Concerns over global climatic change, local air pollution and resource scarcity make photovoltaic (PV) an increasingly attractive energy supply technology. Using solar energy with LEDs instead of HID/MH/CFL provides a very efficient solution in lighting industry.

Solar powered outdoor lighting products are ideal for lighting the area in remote locations where the electricity is unavailable or erratic. Even in urban areas, these find great usage to reduce dependency on conventional power and contribute towards green energy. Reliable and long life makes this solution effective in fulfilling our present and future lighting requirements.

E-LITE semicon





KEY FEATURES



System Light Efficacy 160~175LPW with high performance LED chips.



Highly efficient monocrystalline silicon photovoltaic panels.



Solar powered-No need for any other power supply or electrical cabling.



Easy to Install and Maintain.



Automatic dusk to dawn operation(or timer options).





Five years warranty.

E-LITE semicon




STAY POWERFUL THE DC CHARGE PORT

A DC charge port is offered as an option to be integrated into Aria, ensuring the battery remains charged even during extended periods in the warehouse. No more worrying about flat batteries when you need them the most. Embrace the continuous and dependable lighting with our state-of-the-art Aria solar street light.

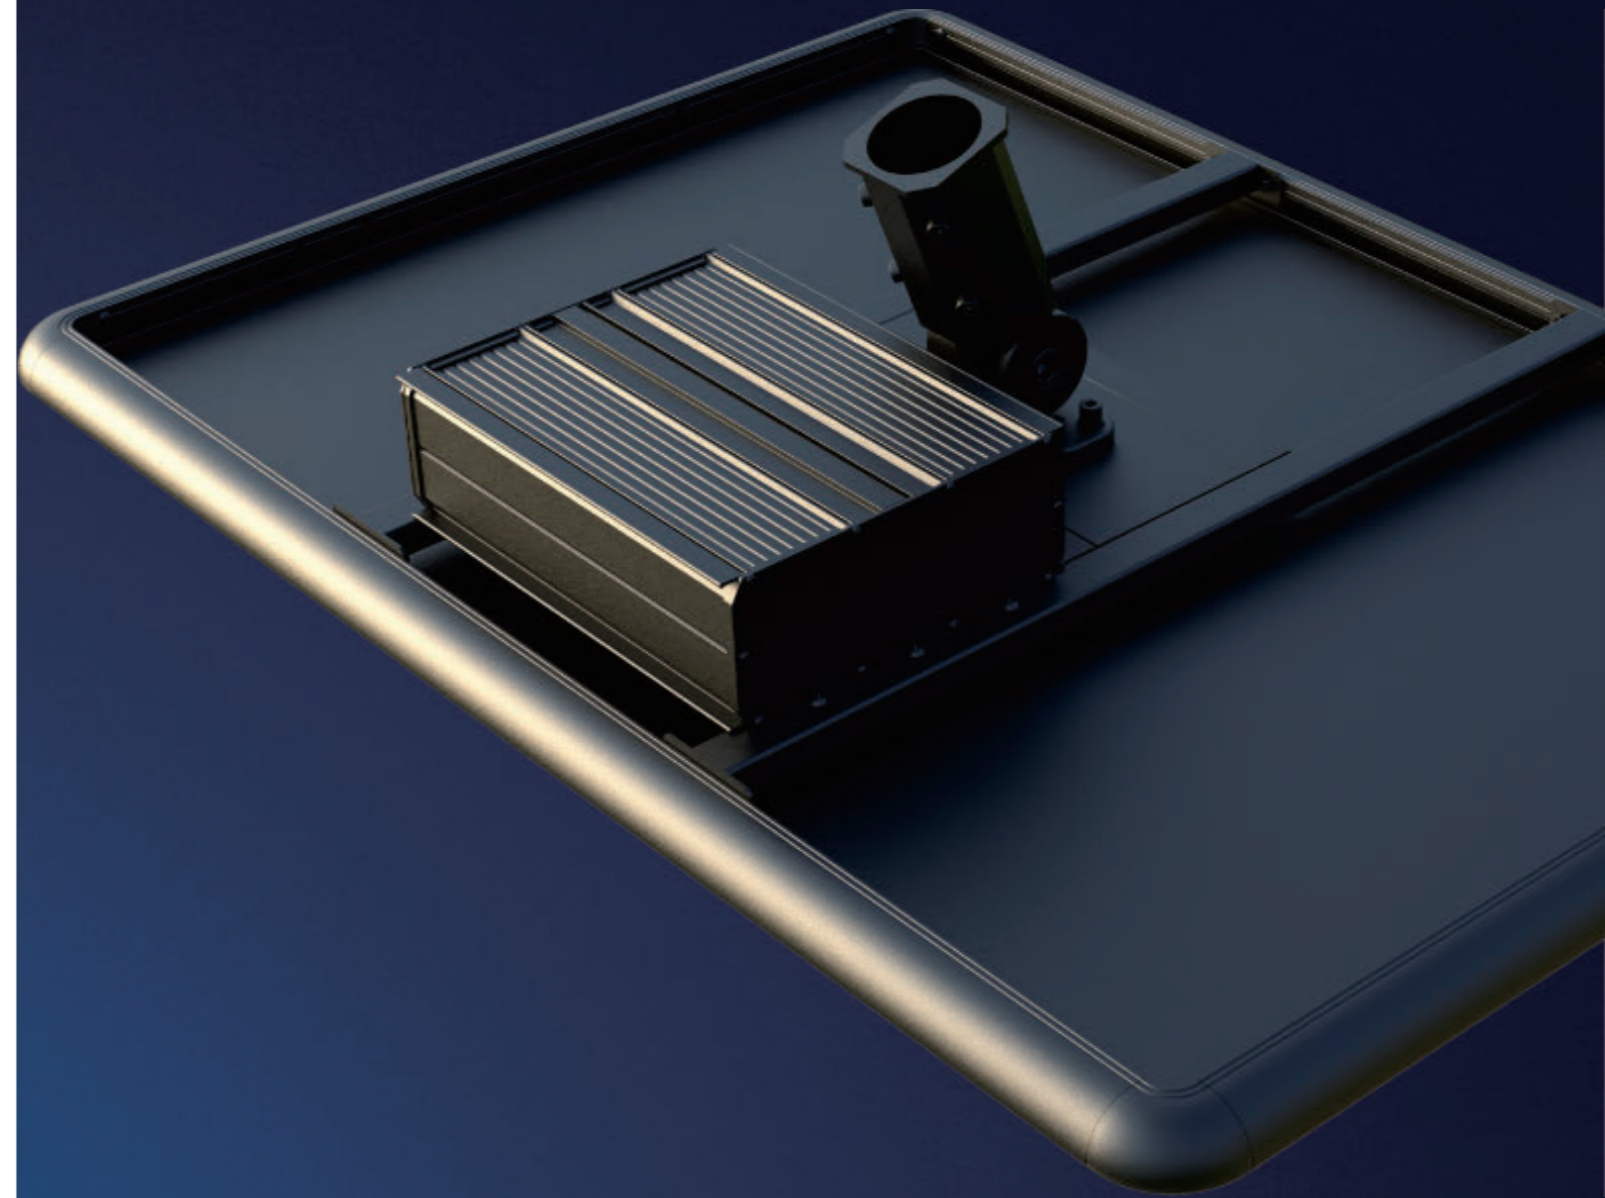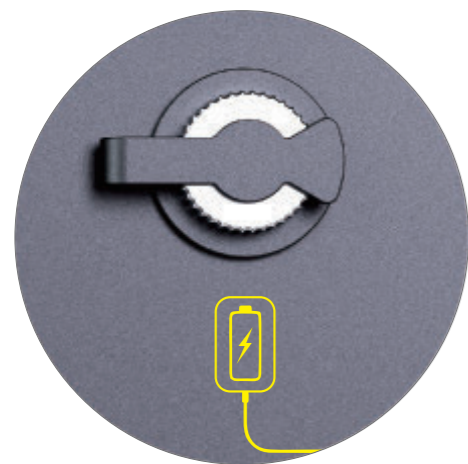

E-LITE semicon

BY
גל-אור
פתרונות סולארים
GAL OR
SOLAR SOLUTIONS

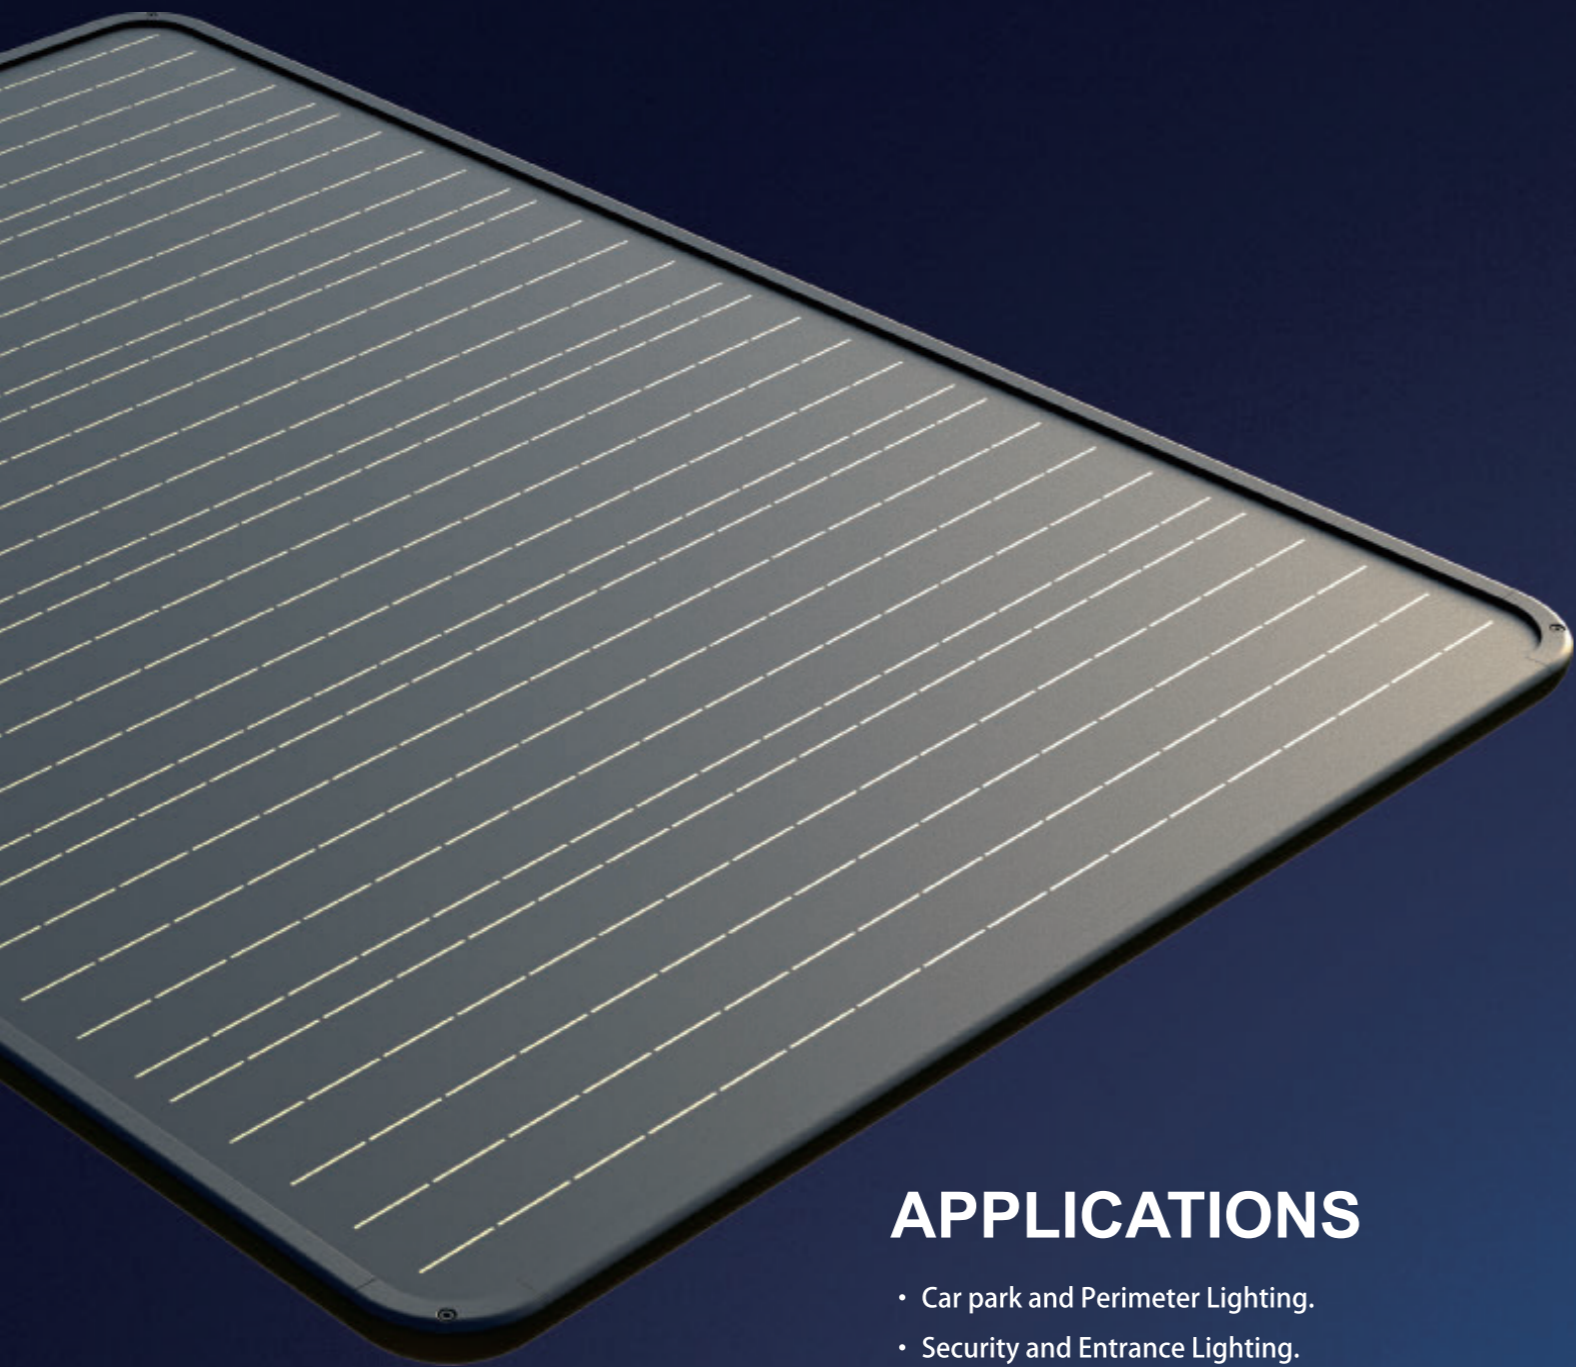

APPLICATIONS

- Car park and Perimeter Lighting.
- Security and Entrance Lighting.
- Signage and Billboard Lighting.
- Temporary & Event Lighting.
- Strata & Public Area Lighting.
- Construction Sites.
- Rural & Remote Area Lighting.
- Mining & Industrial sites.
- Coastal Areas and Jetties.



Only top quality mono - crystalline silicon solar panels with high efficiency and long lifetime are used.



Highly efficient controller to charge your batteries and intelligent microprocessor controlled algorithms for light management ensure maximum uptime.



Quality lithium batteries are used to store the energy, provide energy for immediate requirements, and enable a back-up for days when there is little or no sun.



High Lumen LED for maximum efficacy. Dedicated designed low-voltage solar controller technology with dimming capabilities for power-save management. Lifetime > 50,000 hrs and CRI nominal 70.




Microprocessor managed algorithms autonomously determine sunrise and sunset

E-LITE semicon



DAYTIME OPERATION

The solar panels absorb the sunlight energy, then transmit it to electricity and store it in the battery during the day. Generally, solar panels convert average 20% of sunlight energy into electrical energy

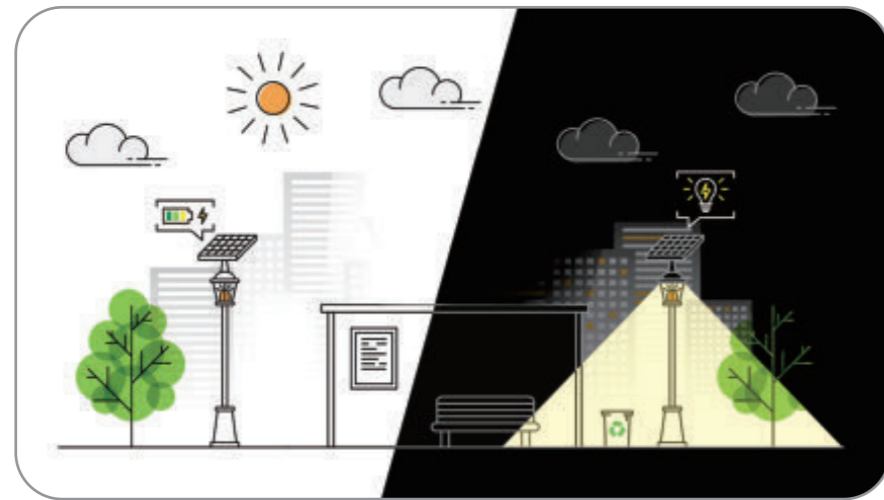

NIGHT TIME OPERATION

At night, the stored electrical energy power the light under the PIR sensor working mode: Keep 10% power lighting when nobody around, 100% full power lighting when people or car coming. The light turns off when the sun rise up, and the day/night operation cycle starts again.

E-LITE semicon





BUILT TO LAST

A top-quality streetlight fixture built to withstand all conditions, and to cope with physical impact and vibration.

One-piece die-cast aluminum housing with integral mounting for strength and durability.

Optics:

Optical systems for outdoor luminaires must be designed to satisfy several criteria in terms of luminaire performance. With a variety of light distributions, Aria series light engine features best in class optical performances. It is designed for convenience and economics, achieving wide column spacing, excellent uniformity plus no waste or obtrusive light.

Tool Free:

Tool free design, the back of the lamp can be opened by hand, which is easy to repair, installation and replacement.

Installation:


Easy to install without buying cables and rectifiers, directly on pole with an adjustable spigot 0°~90°.

E-LITE semicon





PERFORMANCE

	20W~100W
	160lm/W~175lm/W
	Philips Lumileds
	One consecutive rainy day
	PIR
	≥70
	4500~5500K(2500~5500K optional)
	L70>100,000hours
	80×150° / 90×150° / 100×150° / 90×155°
	IP66
	IK09
	Operating Temperature:-20°C to +60°C /-4°F to 140°F (Charge:0°C to 60°C / 32°F to 140°F & Discharge:-20°C to 60°C / -4°F to 140°F) Storing Temperature:-20°C to +60°C/-4°F to 140°F




SPECIFICATIONS

Part#	Power	Solar Panel	Battery	Efficacy (IES)	Total Lumen	Product Dimensions
EL-STAA-20	20W	30W/18V	18AH/12.8V	175 lm/W	3,500lm	620×272×107mm
EL-STAA-40	40W	60W/18V	36AH/12.8V	170 lm/W	6,800lm	720×271×108mm
EL-STAA-50	50W	70W/18V	42AH/12.8V	170 lm/W	8,500lm	750×333×108mm
EL-STAA-60	60W	90W/18V	36AH/12.8V	175 lm/W	10,500lm	850×333×108mm
EL-STAA-70	70W	100W/36V	30AH/25.6V	175 lm/W	12,250lm	850×333×108mm
EL-STAA-100	100W	160W/36V	36AH/25.6V	170 lm/W	17,000lm	850×333×108mm




PHOTOMETRICS


80×150° (TYPE II-M)

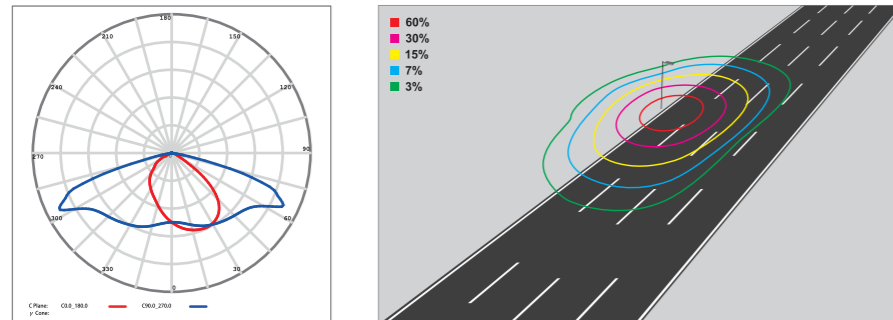


90×150° (TYPE III-S)

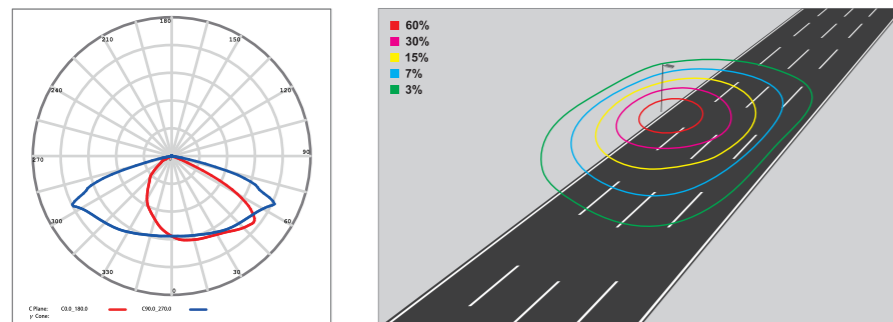

90×155° (TYPE II-S)

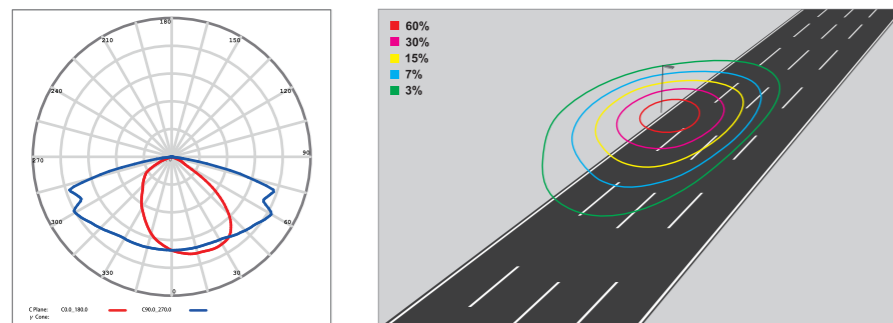

100×150° (TYPE III-M)

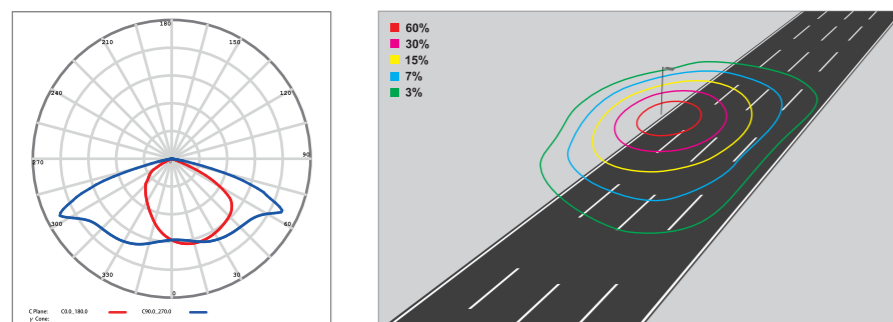


Default setting: 6m high Installation, 100% brightness.





LIGHT DISTRIBUTION

E-Lite in development with Lumileds have created a new LED lens that provides greater luminous uniformity and offers the ultimate in design flexibility. The beam pattern is perfect for lanes, pedestrian promenades, bicycle paths as well as minor roads and car parks. As an added service, E-Lite also has its own internal lighting design team that use the latest Lighting Simulation software for projects requiring calculation of lighting levels and photo-metric reports. This will ensure that the correct quantity of fittings, pole heights and spacings are offered for our customers specific needs.

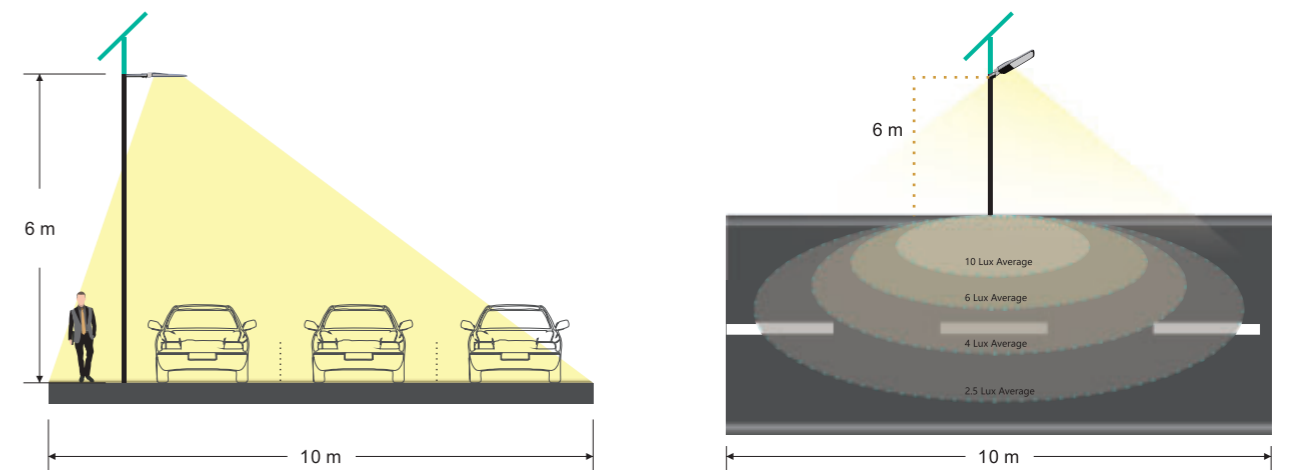

E-LITE semicon




A FUTURE PROOF SOLUTION

Smart City

iNET™ Intelligent Lighting Monitor & Control System is a cloud based wireless smart system designated for lighting management.

With gateways + control node., iNET™ System monitors lights performance status, collects operation data, controls lights on/off or dimming, and sends alarm in case of fault detected.

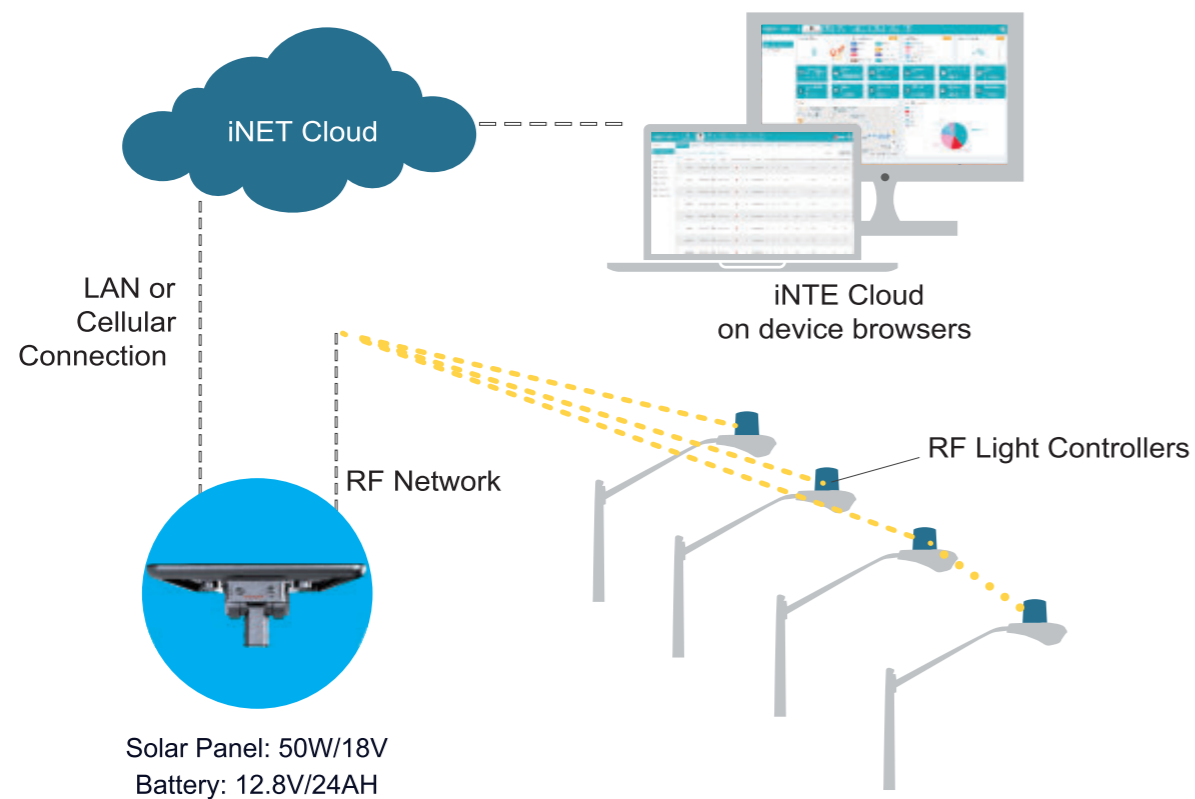


System & Hardwares





- Automatic Light On/Off & Dimming Control**
 - By time setting
 - On/off or dimming with motion sensor detection
 - On/off or dimming with photocell detection
- Accurate Operation & Fault Monitor**
 - Real-time monitor on each light working status
 - Accurate report on fault detected
 - Provide location of fault, no patrol required
 - Collect each light operation data, such as voltage, current, power consumption
- Extra I/O Ports for Sensor Expandability**
 - Environment Monitor
 - Traffic Monitor
 - Security Surveillance
 - Seismic Activities Monitor
- Reliable Mesh Network**
 - Self proprietary wireless control node
 - Reliable node to node, gateway to node communication
 - Up to 1000 nodes per network
 - Max. network diameter 2000m
- Easy-to-use Platform**
 - Easy monitor on each and all lights status
 - Support lighting policy remote set-up
 - Cloud server accessible from computer or hand held device



INSTALLATION

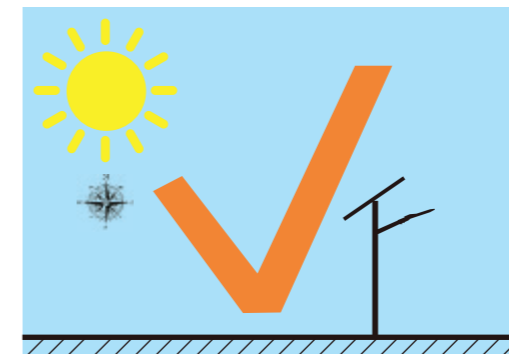

The solar panel can be adjusted to the best angle where it is able to absorb maximum sunshine. The most optimum direction to face the solar panel is somewhere between south and west. It is at this location that the panel will receive the maximum sunlight throughout the day.

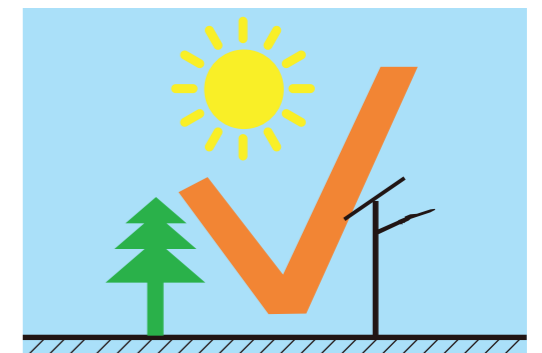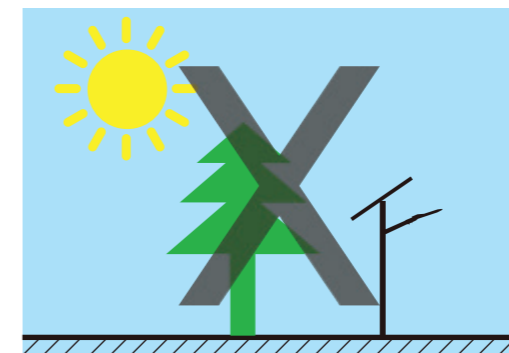

The solar panel must not be installed in a shaded or part shaded location and never indoors.

E-LITE semicon

